



Originally Issued: 06/19/2020

Revised: 06/23/2023

Valid Through: 06/30/2024

WINKLER S.R.L
Via. M. Buonarroti, 15
Cologno Monzese
Milan, Italy 20093
(201) 488 -9291
www.winklerusa.com

Additional Company Name

WINKLER USA
88 South State St.
Hackensack, NJ 07601
(201) 488 -9291

WINGUM PLUS H2O

CSI Sections:

- 07 19 00 Water Repellents
- 07 19 13 Acrylic Water Repellents
- 07 55 56 Fluid-Applied Protected Membrane Roofing

1.0 SCOPE OF LISTING

1.1 Compliance with the following Standards:

- ASTM D6083-05(e01) and 2018 - Standard Specification for Liquid Applied Acrylic Coating Used in Roofing

1.2 Properties assessed:

- Liquid Physical Properties; Viscosity, Volume and Weight Solids.
- Cured Film Physical Properties; Elongation, Tensile Strength, Permeance, Water Swelling, Accelerated Weathering, Adhesion, Fungi Resistance, Tear Resistance and Low Temperature Flexibility.

2.0 FINDINGS

2.1 Product Information: Winkler's Wingum Plus H2O is a liquid applied acrylic coating used for roofing and complies with the liquid physical properties and the cured film physical properties found in ASTM D6083.

2.2 Classification: Wingum Plus H2O is a Type I liquid applied acrylic coating. This classification is determined by measuring the viscosity in accordance with ASTM D2196 and the volume and weight solids per ASTM D2697 and ASTM D1644 respectively as specified by ASTM D6083-15. The viscosity, in accordance with ASMT D562, is greater than the range as defined in ASTM D6083 and meets the performance film physical properties at that viscosity.

3.0 LIMITATIONS

Winkler's Wingum Plus H2O coating as described in this report is recognized as conforming to ASTM D6083 with the following limitations:

3.1 Wingum Plus H2O coating shall be manufactured, identified, and installed in accordance with this report and the applicable code. In the event of a conflict, this report governs.

3.2 The Wingum Plus H2O recognized in this report is produced by Winkler in Milan, Italy.


4.0 INSTALLATION

4.1 General: Wingum Plus H2O shall be applied in accordance with the manufacturer's published installation instructions and this Listing. A copy of the instructions and this listing report shall be available at all times on the jobsite during installation.

4.2 Storage: When kept in its sealed, undamaged package, and stored at temperatures between 41°F and 104°F (5°C and 40°C), Wingum Plus H2O has a storage life of 18 months.

5.0 IDENTIFICATION

Wingum Plus H2O is identified by a label affixed on product packaging. The label shall include the company name (Winkler or Winkler USA), product name, listing report number (UEL-5041) and the name of the inspection agency. Either IAPMO UES Mark of Conformity may also be used as shown below:

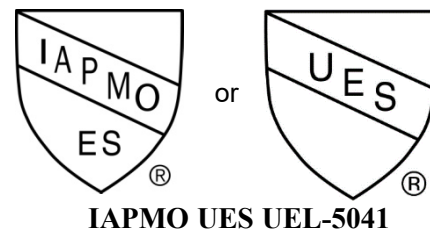

6.0 SUBSTANTIATING DATA

Data in accordance with ASTM D6083 Standard Specification for Liquid Applied Acrylic Coating Used in Roofing. Test reports submitted for evidence are from laboratories in compliance with ISO/IEC 17025.

7.0 STATEMENT OF RECOGNITION

This listing report describes the results of research completed by IAPMO Uniform Evaluation Service on Winkler's Wingum Plus H2O to assess conformance to the standards shown in Section 1.0 of this report and serves as documentation of the product certification. Products are manufactured at the location noted in Section 3.2 of this report under a quality control program with periodic inspection under the supervision of IAPMO UES.

For additional information about this listing report please visit www.uniform-es.org or email us at info@uniform-es.org

