



### C.I.M. INDUSTRIES INC. CIM 800, CIM 1000, CIM 1000 TROWEL GRADE AND CIM 1061 WATERPROOFING MEMBRANE

CSI Section: 07 10 00 Dampproofing and  
Waterproofing

CSI Section: 07 14 00 Fluid Applied  
Waterproofing

CSI Section: 09 31 00 Thin-Set Tiling

CSI Section: 09 34 00 Waterproofing-Membrane Tiling

#### 1.0 RECOGNITION

C.I.M. Industries Inc. and the CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061 waterproofing membranes recognized in this report have been evaluated for moisture protection. The following code editions are recognized:

- 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2012 and 2009 Uniform Plumbing Code® (UPC)

#### 2.0 LIMITATIONS

The CIM water proofing membranes (CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061) described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

**2.1** The materials shall be applied in accordance with this report and the manufacturer's published installation instructions. In the event of a conflict between the installation instructions and this report, the more restrictive shall govern.

**2.2** Application over expansion joints is outside the scope of this report.

#### 3.0 PRODUCT USE

**3.1 General:** The CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061 waterproofing membranes are used on concrete, steel, other metals, glass, wood, and previous coatings and linings as barriers to positive liquid water migration in load-bearing, bonded, thin-set ceramic tile and dimension stone installations on floors, and also may be used as shower sub-pan linings. The membranes comply with IBC Section 2103 and UPC Section 408.7.

**3.2 Installation:** Installation of CIM waterproofing membranes (CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061) shall comply with this report and the manufacturer's published installation instructions. The manufacturer's installation instructions shall be available at the jobsite at all times during installation. Where conflicts occur, the more restrictive shall govern. CIM waterproofing membranes shall be applied at a thickness of 60 wet mils minimum. In projects requiring adhesion of thinset mortar to the waterproofing membrane, second coating of 10-20 mils of CIM shall be applied within the two-to-four recoat window, and immediately thereafter, broadcasting dry aggregate into this tack coat until refusal. This provides a bonded aggregate surface to which the mortar will adhere. Thinset mortar may be applied the following day after removal of any non-bonded aggregate.

**3.3 Surface Preparation:** Substrates shall be clean and dry with no oils, grease, or loose debris. CIM Bonding Agent is recommended on all non-porous substrates. Adhesion tests shall be performed to confirm adequacy of surface preparation. The C.I.M. Industries published installation instructions provide specific details for each substrate.

#### 4.0 PRODUCT DESCRIPTION

**4.1 Product information:** The CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061 are liquid-applied materials that cure to a monolithic, elastomeric membrane.

#### 4.2 Material information

**4.2.1 CIM 800:** CIM 800 is available in mixed units of 5 gallons. Each unit consists of a container of premix and a smaller container of activator. The 4.6- gallon premix unit has 37 lbs. per pail and 4 lbs. per jug of the activator. Shelf life is two years for the premix and 6 months for the activator when stored unopened at temperatures between 20°F and 110°F (-7°C and 43°C) for the premix and 70°F and 95°F (21°C and 35°C) for the activator. The percent solids content by volume is 90 percent (1448 dry mils x sq. ft. / gal.).

**4.2.2 CIM 1000:** CIM 1000 is available in mixed units of 5 gallons. Each unit consists of a container of premix and a smaller container of activator. The 5-gallon unit has 36 lbs. per pail of premix and 5 lbs. per jug of activator. Shelf life is two years for the premix and 6 months for the activator when stored unopened at temperatures between 20°F and 110°F (-7°C and 43°C) for the premix and 70°F and 95°F (21°C and 35°C) for the activator. The percent solids content by volume is 88 percent (1413 dry mils x sq. ft. / gal.).






**4.2.3 CIM 1000 TROWEL GRADE:** CIM 1000 TROWEL GRADE is available in mixed units 4.5 gallons, 0.8 gallons kits and 850 ml dual component cartridges. Each unit consists of a container of premix and a smaller container of activator. The 4.5- gallon unit has 32 lbs. per pail of Premix and 5 lbs. per jug of activator. The 0.8- gallon kit has 5.7 lbs. per can of premix and 0.9 lbs. per bottle of activator. The 850- ml cartridge includes a 750 ml premix tube, a 100- ml activator tube and the static mixer to combine the two during application. Shelf life is two years for the premix and 6 months for the activator when stored unopened at temperatures between 20°F and 110°F (-7°C and 43°C) for the premix and 70°F and 95°F (21°C and 35°C) for the activator. The percent solids content by volume is 89 percent (1431 dry mils x sq. ft/gal).

**4.2.4 CIM 1061:** CIM 1061 is available in mixed units of 5 gallons and 0.8 gallons. Each unit consists of a container of premix and a smaller container of activator. The 5- gallon unit has 35.7 lbs. per pail of Premix and 5.7 lbs. per jug of activator. The 0.8- gallon kit has 5.7 lbs. per can of Premix and 0.9 lbs. per bottle of activator. Shelf life is two years for the premix and 6 months for the activator when stored unopened at temperatures between 20°F and 110°F (-7°C and 43°C) for the premix and 70°F and 95°F (21°C and 35°C) for the activator. The percent solids by volume is 88 percent (1416 dry mils x sq. ft. / gal).

### 5.0 IDENTIFICATION

Each container of CIM waterproofing (CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061) bears a label with the C.I.M. Industries Inc., name and address, the product name, the date of manufacture and the IAPMO Uniform ES Mark of Conformity the name of the inspection agency (when applicable) and the Evaluation Report Number (ER-183) to identify the products recognized in this report. A die-stamp label may also substitute for the label. Either Mark of Conformity may be used as shown below:

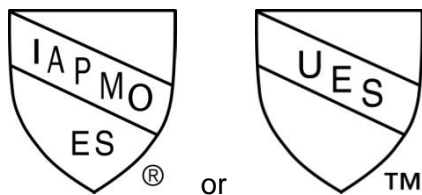

IAPMO UES ER-183

### 6.0 SUBSTANTIATING DATA

**6.1** Data in accordance with ANSI A118.10-2008

**6.2** Data in accordance with ICC-ES AC115 approved June 2003 (Editorially Revised November 2016).

### 7.0 CONTACT INFORMATION

**C.I.M. INDUSTRIES INC.**  
 23 ELM STREET  
 PETERBOROUGH, NH 03458  
 (603) 924-9481  
[www.cimindustries.com](http://www.cimindustries.com)  
[dlibby@chasecorp.com](mailto:dlibby@chasecorp.com)

### 8.0 STATEMENT OF RECOGNITION

This evaluation report describes the results of research carried out by IAPMO Uniform Evaluation Service on C.I.M. Industries Inc. and the CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061 waterproofing membranes to assess their conformance to the codes shown in Section 1.0 of this report and documents the product's certification.

**Brian Gerber, P.E., S.E.**  
 Vice President, Technical Operations  
 Uniform Evaluation Service

**Richard Beck, PE, CBO, MCP**  
 Vice President, Uniform Evaluation Service

**GP Russ Chaney**  
 CEO, The IAPMO Group

For additional information about this evaluation report please visit [www.uniform-es.org](http://www.uniform-es.org) or email us at [info@uniform-es.org](mailto:info@uniform-es.org)