



C.I.M. INDUSTRIES INC.
23 ELM STREET
PETERBOROUGH, NH 03458
(603) 924-9481

www.cimindustries.com
dlibby@chasecorp.com

CIM 800, CIM 1000, CIM 1000 TROWEL GRADE AND CIM 1061 WATERPROOFING MEMBRANE

CSI Section: 07 10 00 Dampproofing and Waterproofing

CSI Section: 07 14 00 Fluid Applied Waterproofing

CSI Section: 09 31 00 Thin-Set Tiling

CSI Section: 09 34 00 Waterproofing-Membrane Tiling

1.0 RECOGNITION

C.I.M. Industries Inc. and the CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061 waterproofing membranes recognized in this report have been evaluated for moisture protection. CIM 800 has been evaluated for use as an exterior, below grade dampproofing and waterproofing coating and its performance has been evaluated for decay resistance, water penetration resistance, durability, adhesion, hydrostatic pressure and temperature. These products have been evaluated with the following codes and regulations:

- 2018, 2015, and 2012 International Building Code® (IBC)
- 2018, 2015, and 2012 Uniform Plumbing Code® (UPC)
- 2019 California Building Code – see supplement attached
- 2020 City of Los Angeles Building Code (LABC)- see supplement attached

2.0 LIMITATIONS

The CIM water proofing membranes (CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061) described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

2.1 The materials shall be applied in accordance with this report and the manufacturer's published installation instructions. In the event of a conflict between the installation instructions and this report, the more restrictive shall govern.

2.2 Application over expansion joints is outside the scope of this report. Seams and repairs shall be completed in accordance with the manufacturer's installation instructions and recommendations.

2.3 The design and construction of the foundation and the drainage system is outside the scope of this report. The foundation drainage shall be installed in accordance with IBC Section 1805.4.

2.4 The membranes in this report have not been evaluated for sealing joints or penetrations of fire-rated assemblies.

2.5 The dampproofing and waterproofing membranes recognized in this report shall be produced by CIM Industries, Inc. in Houston, TX.

3.0 PRODUCT USE

3.1 General: The CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061 waterproofing membranes are used on concrete, steel, other metals, glass, wood, and previous coatings and linings as barriers to positive liquid water migration in loadbearing, bonded, thin-set ceramic tile and dimension stone installations on floors, and also may be used as shower sub-pan linings. The membranes comply with IBC Section 2103 and UPC Section 408.7.

3.2 Installation: Installation of CIM waterproofing membranes (CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061) shall comply with this report and the manufacturer's published installation instructions. The manufacturer's installation instructions shall be available at the jobsite at all times during installation. CIM waterproofing membranes shall be applied at a thickness of 60 wet mils minimum. In projects requiring adhesion of thinset mortar to the waterproofing membrane, second coating of 10-20 mils of CIM shall be applied within the two-to-four recoat window, and immediately thereafter, broadcasting dry aggregate into this tack coat until refusal. This provides a bonded aggregate surface to which the mortar will adhere. Thinset mortar may be applied the following day after removal of any non-bonded aggregate.

3.3 Surface Preparation: Substrates shall be clean and dry with no oils, grease, or loose debris. CIM Bonding Agent is recommended on all non-porous substrates. Adhesion tests shall be performed to confirm adequacy of surface preparation. The C.I.M. Industries published installation instructions provide specific details for each substrate.

The product described in this Uniform Evaluation Service (UES) Report has been evaluated as an alternative material, design or method of construction in order to satisfy and comply with the intent of the provision of the code, as noted in this report, and for at least equivalence to that prescribed in the code in quality, strength, effectiveness, fire resistance, durability and safety, as applicable, in accordance with IBC Section 104.11. This document shall only be reproduced in its entirety.





3.4 CIM 800 Exterior Below-Grade Use: CIM 800 is applicable for application on concrete masonry unit and concrete foundations walls for below-grade construction. CIM 800 when used as a waterproofing membrane is an alternative to the waterproofing materials as described in IBC Section 1805.3.2 and IRC Section R406.2. CIM 800 has a resistance to hydrostatic pressure of 7.5 psi (20.7 kPa) over a 1/16-inch wide (1.6 mm) crack when tested in accordance with ASTM C1306 and installed in accordance with Section 3.2 of this report. The ambient air temperature during application and curing of the coating shall be in the range of -15°F to 100°F (-26°C to 38°C). The wall can be backfilled once the coating is cured. Foundation walls have no time restrictions of backfilling based on exposure to sunlight. Backfill shall be placed in accordance with IBC Section 1804.3. All joints overlapping between cured and new applications shall be a minimum width of 6-inches (152.4 mm) in accordance with the manufacturer’s specifications.

4.0 PRODUCT DESCRIPTION

4.1 Product information: The CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061 are liquid-applied materials that cure to a monolithic, elastomeric membrane.

4.2 Material information

4.2.1 CIM 800: CIM 800 is available in mixed units of 5 gallons. Each unit consists of a container of premix and a smaller container of activator. The 4.6- gallon premix unit has 37 lbs. per pail and 4 lbs. per jug of the activator. Shelf life is two years for the premix and 6 months for the activator when stored unopened at temperatures between 20°F and 110°F (-7°C and 43°C) for the premix and 70°F and 95°F (21°C and 35°C) for the activator. The percent solids content by volume is 90 percent (1448 dry mils x sq. ft. / gal.).

4.2.2 CIM 1000: CIM 1000 is available in mixed units of 5 gallons. Each unit consists of a container of premix and a smaller container of activator. The 5-gallon unit has 36 lbs. per pail of premix and 5 lbs. per jug of activator. Shelf life is two years for the premix and 6 months for the activator when stored unopened at temperatures between 20°F and 110°F

(-7°C and 43°C) for the premix and 70°F and 95°F (21°C and 35°C) for the activator. The percent solids content by volume is 88 percent (1413 dry mils x sq. ft. / gal.).


4.2.3 CIM 1000 TROWEL GRADE: CIM 1000 TROWEL GRADE is available in mixed units 4.5 gallons, 0.8 gallons kits and 850 ml dual component cartridges. Each unit consists of a container of premix and a smaller container of activator. The 4.5- gallon unit has 32 lbs. per pail of Premix and 5 lbs. per jug of activator. The 0.8- gallon kit has 5.7 lbs. per can of premix and 0.9 lbs. per bottle of activator. The 850-ml cartridge includes a 750-ml premix tube, a 100-ml activator

tube and the static mixer to combine the two during application. Shelf life is two years for the premix and 6 months for the activator when stored unopened at temperatures between 20°F and 110°F (-7°C and 43°C) for the premix and 70°F and 95°F (21°C and 35°C) for the activator. The percent solids content by volume is 89 percent (1431 dry mils x sq. ft./gal).

4.2.4 CIM 1061: CIM 1061 is available in mixed units of 5 gallons and 0.8 gallons. Each unit consists of a container of premix and a smaller container of activator. The 5- gallon unit has 35.7 lbs. per pail of Premix and 5.7 lbs. per jug of activator. The 0.8- gallon kit has 5.7 lbs. per can of Premix and 0.9 lbs. per bottle of activator. Shelf life is two years for the premix and 6 months for the activator when stored unopened at temperatures between 20°F and 110°F (-7°C and 43°C) for the premix and 70°F and 95°F (21°C and 35°C) for the activator. The percent solids by volume is 88 percent (1416 dry mils x sq. ft. / gal).

5.0 IDENTIFICATION

Each container of CIM waterproofing (CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061) bears a label with the C.I.M. Industries Inc., name and address, the product name, the date of manufacture and the IAPMO Uniform ES Mark of Conformity the name of the inspection agency (when applicable) and the Evaluation Report Number (ER-183) to identify the products recognized in this report. A die-stamp label may also substitute for the label. Either Mark of Conformity may be used as shown below:

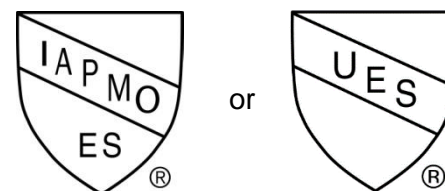

IAPMO UES ER-183

6.0 SUBSTANTIATING DATA

6.1 Data in accordance with ANSI A118.10-2008

6.2 Data in accordance with ICC-ES Acceptance Criteria for Waterproof Membranes for Flooring and Shower Lining (AC115) approved June 2003 (Editorially Revised November 2016).


6.3 Data in accordance with ICC-ES Acceptance Criteria for Cold, Liquid-applied, Below-Grade, Exterior Dampproofing and Waterproofing Materials (AC29) approved June 2011 (Editorially Revised March 2019).





6.4 Test reports submitted for evidence are from laboratories in compliance with ISO/IEC 17025.

7.0 STATEMENT OF RECOGNITION

This evaluation report describes the results of research carried out by IAPMO Uniform Evaluation Service on C.I.M. Industries Inc. and the CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061 waterproofing membranes to assess their conformance to the codes shown in Section 1.0 of this report and documents the product's certification. Products are manufactured at the location noted in Section 2.5 of this report under a quality control program with periodic inspection under the supervision of IAPMO UES.


Brian Gerber, P.E., S.E.
Vice President, Technical Operations
Uniform Evaluation Service


Richard Beck, PE, CBO, MCP
Vice President, Uniform Evaluation Service


GP Russ Chaney
CEO, The IAPMO Group

For additional information about this evaluation report please visit www.uniform-es.org or email us at info@uniform-es.org



CALIFORNIA SUPPLEMENT

C.I.M. INDUSTRIES INC.
23 ELM STREET
PETERBOROUGH, NH 03458
(603) 924-9481
www.cimindustries.com
dlibby@chasecorp.com

CIM 800, CIM 1000, CIM 10
00 TROWEL GRADE AND CIM 1061
WATERPROOFING MEMBRANE

CSI Section: 07 10 00 Dampproofing and
Waterproofing
CSI Section: 07 14 00 Fluid Applied
Waterproofing
CSI Section: 09 31 00 Thin-Set Tiling
CSI Section: 09 34 00 Waterproofing-Membrane Tiling

1.0 RECOGNITION

C.I.M. Industries Inc. and the CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061 waterproofing membranes as evaluated in IAPMO UES ER-183 and with changes as noted in this supplement is a satisfactory alternative for use in building built under the following codes (and regulations):

- 2019 California Building Code (CBC)

2.0 LIMITATIONS

The CIM water proofing membranes (CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061) described in ER- 183 and this report supplement is subject to the following limitations:

2.1 The materials shall be applied in accordance with this report and the manufacturer's published installation instructions. In the event of a conflict between the installation instructions and this report, the more restrictive shall govern.



CITY OF LOS ANGELES SUPPLEMENT

C.I.M. INDUSTRIES INC.
23 ELM STREET
PETERBOROUGH, NH 03458
(603) 924-9481
www.cimindustries.com
dlibby@chasecorp.com

CIM 800, CIM 1000, CIM 1000 TROWEL GRADE AND CIM 1061 WATERPROOFING MEMBRANE

CSI Section: 07 10 00 Dampproofing and
Waterproofing
CSI Section: 07 14 00 Fluid Applied
Waterproofing
CSI Section: 09 31 00 Thin-Set Tiling
CSI Section: 09 34 00 Waterproofing-Membrane Tiling

1.0 RECOGNITION

C.I.M. Industries Inc. and the CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061 waterproofing membranes as evaluated represented in IAPMO UES ER-183, The California Supplement to ER-183 and this supplement report has been evaluated for moisture protection. CIM 800 has been evaluated for use as an exterior, below grade dampproofing and waterproofing coating and its performance has been evaluated for decay resistance, water penetration resistance, durability, adhesion, hydrostatic pressure and temperature. These membranes were evaluated for compliance with the following codes and regulations:

- 2020 City of Los Angeles Building Code (LABC)

2.0 LIMITATIONS

The CIM water proofing membranes (CIM 800, CIM 1000, CIM 1000 TROWEL GRADE, and CIM 1061) described in ER- 183 and this report supplement is subject to the following limitations:

2.1 The materials shall be applied in accordance with this report and the manufacturer's published installation instructions. In the event of a conflict between the installation instructions and this report, the more restrictive shall govern.

For additional information about this evaluation report please visit www.uniform-es.org or email us at info@uniform-es.org